



	a	b	c	d	e	f	g	h	k	m	n	o	p	q	r
A	600	8	16	170	190	286	600	400	24	90	9	80	DM	80	80DN
B	750	10	20	212	238	358	750	500	30	113	12	100	DM	75	100DN
C	900	12	24	255	285	429	900	600	36	136	15	120	DM	90	120DN

Note: \* Reduce spacing between letters by 5%

Application: For use in exposed areas where there is potential vehicle stability issues arising from strong cross winds.


Colour Legend



Black



Retroreflective yellow

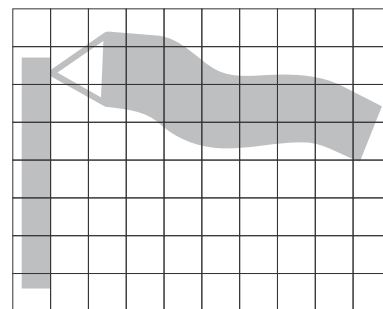

**Queensland Government**  
Department of **Main Roads**

**WARNING SIGN**  
**"HIGH WIND AREA"**

Planning Design and Operations Division  
Traffic Engineering Section

ORIGINAL APPROVED AS OFFICIAL TRAFFIC SIGN

*[Signature]*  
PRINCIPAL ENGINEER  
(Traffic Engineering)

30/01/07  
Date

**TC1626**

Designed  
RH 01/07

Checked  
JD 01/07

Scale  
Not to Scale

A ☐ ☐ ☐ ☐ ☐