

**Sign
sequence**



Off



On 1



On 2

Colour Legend

 White LED
 Red LED
 Black

	a	b	c	d	e	r	r ₁	r ₂
SIZE A	450	225	115	65D	30	45	185	220
SIZE B	600	300	155	85D	40	60	245	295
SIZE C	900	450	230	130D	60	90	370	440
SIZE D	1200	600	310	170D	80	120	490	590

Notes

- This sign may be installed at locations where a NO ENTRY message is required to be enforced, either,
 - Permanently
The symbol, NO ENTRY legend and all rings of the annulus are to be illuminated at all times (Sign sequence On 2), or
 - At set times or set conditions
 - When entry is permitted the sign should remain off (no LED illumination) (Sign sequence - Off).
 - When entry is prohibited, the symbol, NO ENTRY legend and outer ring(s) of the annulus are to be illuminated while the inner ring(s) is /are to flash at the defined rate, for greater conspicuity (Sign Sequence - On 1 / On 2).
- The number of rows in the red annulus are defined in MRTS206.
- Inner rings of the red annulus must be capable of flashing separately in accordance with AS1742.14.
- For a bigger sign face option, refer to page 2.
- * Corner radius may vary with manufacturing requirements.
- LED details are indicative and should comply with standard display requirements in AS4852.
- The NO ENTRY legend should be arranged to match the fonts in accordance with AS4852.
- For MRTS specifications contact the technical publications team by emailing: mr.techdocs@tmr.qld.gov.au



**Queensland
Government**

**LED WARNING SIGN
"NO ENTRY"**

Department of Transport and Main Roads
Infrastructure Management & Delivery Division

APPROVED AS OFFICIAL TRAFFIC SIGN


PRINCIPAL ENGINEER
(Traffic Engineering Practice)

05/06/23
Date

TC2210_1


Page 1 of 2

Designed
TV 12/15

Checked
JP 06/23

Scale
Not to Scale

A B C D

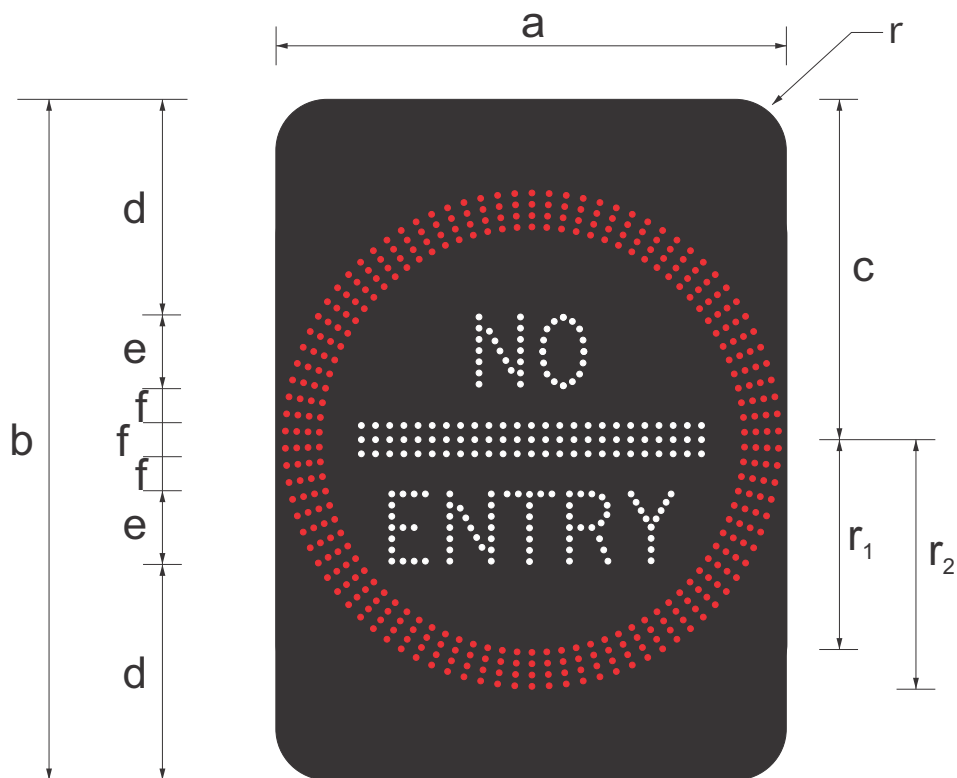

Colour Legend

 White LED
 Red LED
 Black

	a	b	c	d	e	f	r*	r ₁	r ₂
SIZE A	450	600	300	190	65D	30	45	185	220
SIZE B	600	800	400	255	85D	40	60	245	295
SIZE C	900	1200	600	380	130D	60	90	370	440
SIZE D	1200	1600	800	510	170D	80	120	490	590

Notes

- This sign may be installed at locations where a NO ENTRY message is required to be enforced, either,
 - Permanently
The symbol, NO ENTRY legend and all rings of the annulus are to be illuminated at all times (Sign sequence On 2), or
 - At set times or set conditions
 - When entry is permitted the sign should remain off (no LED illumination) (Sign sequence - Off).
 - When entry is prohibited, the symbol, NO ENTRY legend and outer ring(s) of the annulus are to be illuminated while the inner ring(s) is /are to flash at the defined rate, for greater conspicuity (Sign Sequence - On 1 / On 2).
- The number of rows in the red annulus are defined in MRTS206.
- Inner rings of the red annulus must be capable of flashing separately in accordance with AS1742.14.
- For a smaller sign face option, refer to page 1.
- * Corner radius may vary with manufacturing requirements.
- LED details are indicative and should comply with standard display requirements in AS4852.
- The NO ENTRY legend should be arranged to match the fonts in accordance with AS4852.
- For MRTS specifications contact the technical publications team by emailing: mr.techdocs@tmr.qld.gov.au



**Queensland
Government**

LED WARNING SIGN "NO ENTRY"

Department of Transport and Main Roads
Infrastructure Management & Delivery Division

APPROVED AS OFFICIAL TRAFFIC SIGN


PRINCIPAL ENGINEER
(Traffic Engineering Practice)

05/06/23
Date

TC2210_2

Page 2 of 2

Designed
TV 12/15

Checked
JP 06/23

Scale
Not to Scale

A B C D