

	a	b	c	d	e	f	g	h	k	m	n	o	p	s	t	u	r
A	2150	2600	18	36	95	120DN	65	55	113	450	105	62	400	300	475	291	150
B	3225	3500	25	50	140	180DN	100	80	170	675	160	95	400	450	715	435	200
C	4300	4400	36	72	190	240DN	130	110	225	900	210	125	400	600	950	582	300

Colour Legend

- Black
- Retroreflective white
- Retroreflective yellow
- Retroreflective red

Notes:

1. May be used in advance of a tunnel where an alternate route is available.
2. * See Page 6 for patch details.
3. ** Insert clearance height.
4. # Insert dangerous goods classes as required.
5. ## When high or dangerous goods vehicles are detected, the relevant group of 4 x 200 mm diameter flashing lanterns are to operate in accordance with ITS guidelines.



**Queensland
Government**

WARNING SIGN "PROHIBITED IN TUNNEL - USE ALTERNATE ROUTE"

Road Safety and Systems Management Division
Road Safety Unit

ORIGINAL APPROVED AS OFFICIAL TRAFFIC SIGN

Designed
TV 2/10

Checked
DJ 02/10

Scale
Not to Scale



PRINCIPAL ENGINEER
(Traffic Engineering)

09/02/10
Date

TC1812_1

Page 1 of 6

A

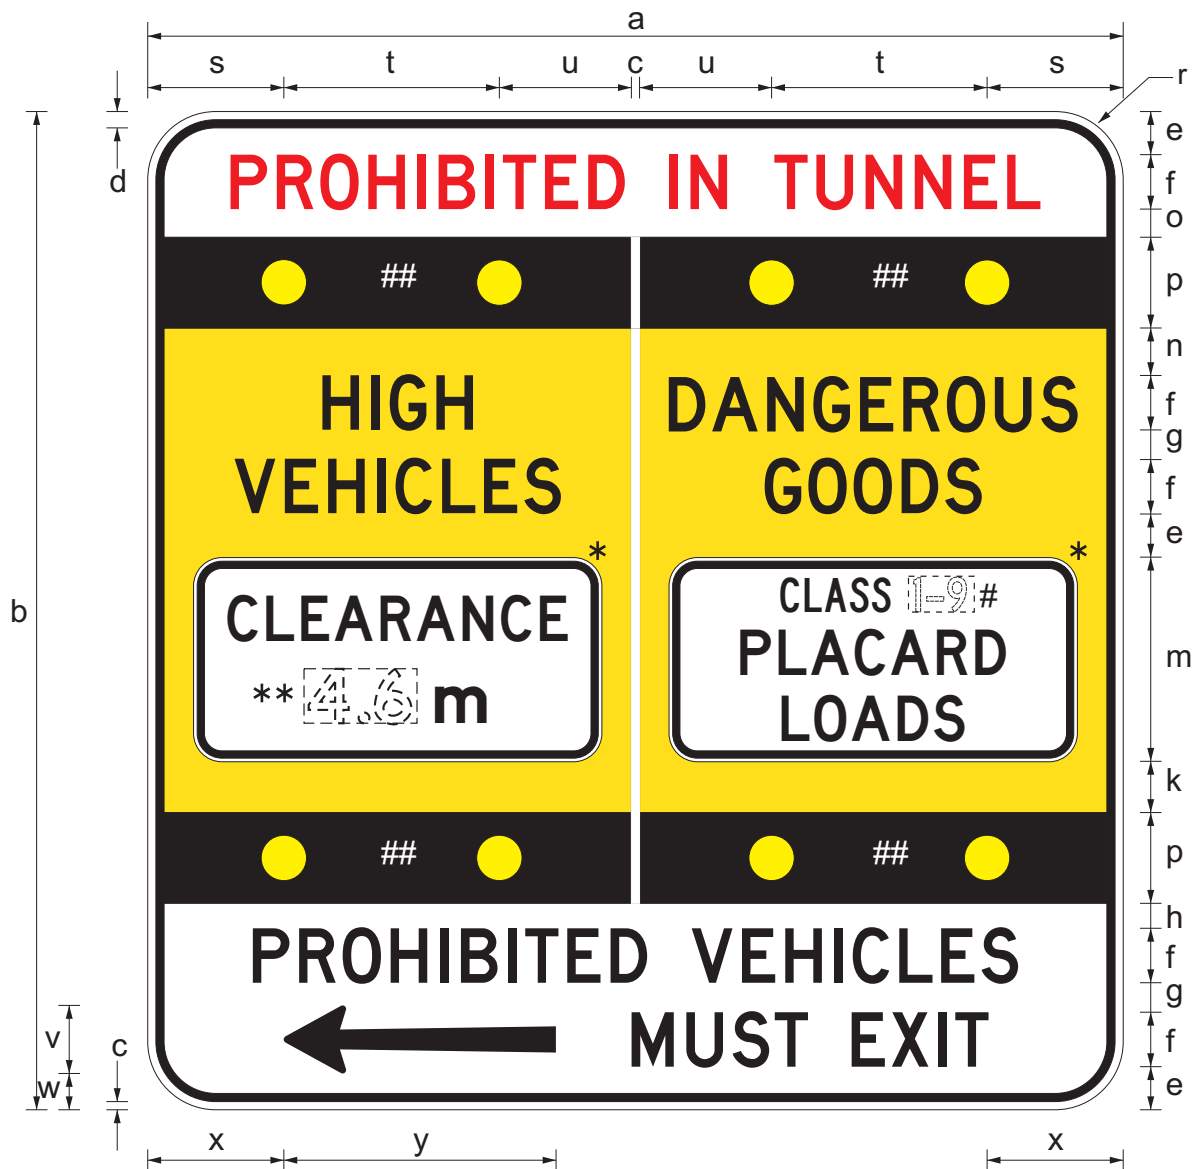


	a	b	c	d	e	f	g	h	k	m	n	o	p	s	t	u	v	w	x	y	r
A	2150	2600	18	36	95	120DN	65	55	113	450	105	62	400	300	475	291	150	80	300	600	150
B	3225	3500	25	50	140	180DN	100	80	170	675	160	95	400	450	715	435	225	120	450	900	200
C	4300	4400	36	72	190	240DN	130	110	225	900	210	125	400	600	950	582	300	160	600	1200	300

Colour Legend

- Black
- Retroreflective white
- Retroreflective yellow
- Retroreflective red

Notes:

1. May be used in advance of a tunnel where an alternate route is available.
2. * See Page 6 for patch details.
3. ** Insert clearance height.
4. # Insert dangerous goods classes as required.
5. ## When high or dangerous goods vehicles are detected, the relevant group of 4 x 200 mm diameter flashing lanterns are to operate in accordance with ITS guidelines.



**Queensland
Government**

WARNING SIGN "PROHIBITED IN TUNNEL - MUST EXIT (LEFT)"

Road Safety and Systems Management Division
Road Safety Unit

ORIGINAL APPROVED AS OFFICIAL TRAFFIC SIGN

Designed
TV 2/10

Checked
DJ 02/10

Scale
Not to Scale


[Signature]
PRINCIPAL ENGINEER
(Traffic Engineering)

09/02/10
Date

TC1812_2

Page 2 of 6

A ☐ ☐ ☐ ☐ ☐

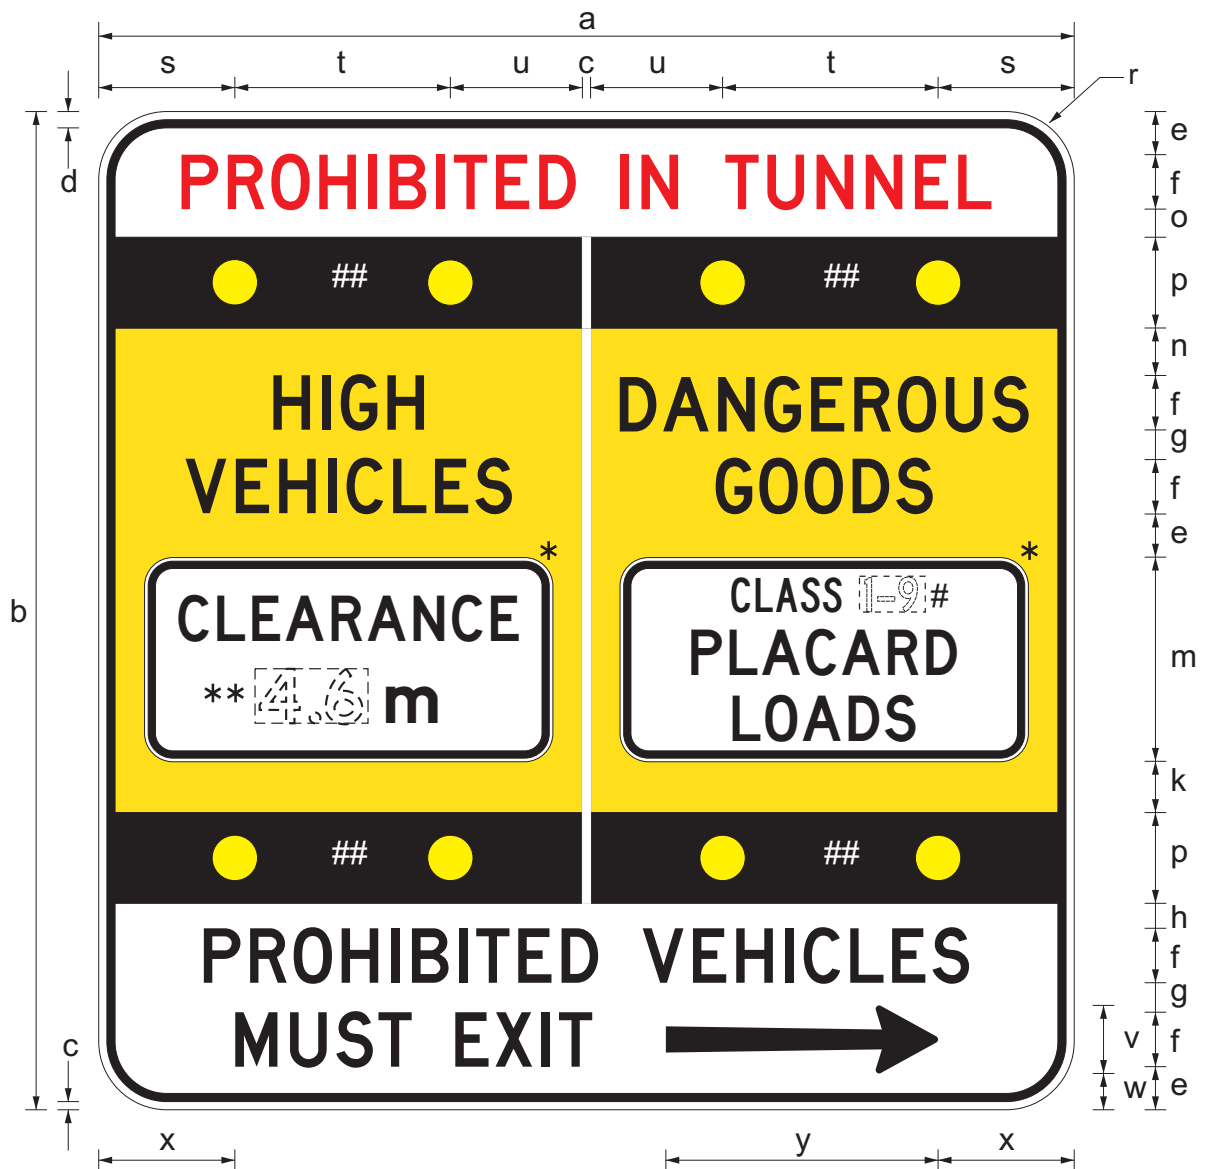

	a	b	c	d	e	f	g	h	k	m	n	o	p	s	t	u	v	w	x	y	r
A	2150	2600	18	36	95	120DN	65	55	113	450	105	62	400	300	475	291	150	80	300	600	150
B	3225	3500	25	50	140	180DN	100	80	170	675	160	95	400	450	715	435	225	120	450	900	200
C	4300	4400	36	72	190	240DN	130	110	225	900	210	125	400	600	950	582	300	160	600	1200	300

Colour Legend

- Black
- Retroreflective white
- Retroreflective yellow
- Retroreflective red

Notes:

1. May be used in advance of a tunnel where an alternate route is available.
2. * See Page 6 for patch details.
3. ** Insert clearance height.
4. # Insert dangerous goods classes as required.
5. ## When high or dangerous goods vehicles are detected, the relevant group of 4 x 200 mm diameter flashing lanterns are to operate in accordance with ITS guidelines.



**Queensland
Government**

WARNING SIGN "PROHIBITED IN TUNNEL - MUST EXIT (RIGHT)"

Road Safety and Systems Management Division
Road Safety Unit

ORIGINAL APPROVED AS OFFICIAL TRAFFIC SIGN

Designed
TV 2/10

Checked
DJ 02/10

Scale
Not to Scale



PRINCIPAL ENGINEER
(Traffic Engineering)

09/02/10
Date

TC1812_3

Page 3 of 6

A ☐ ☐ ☐ ☐ ☐

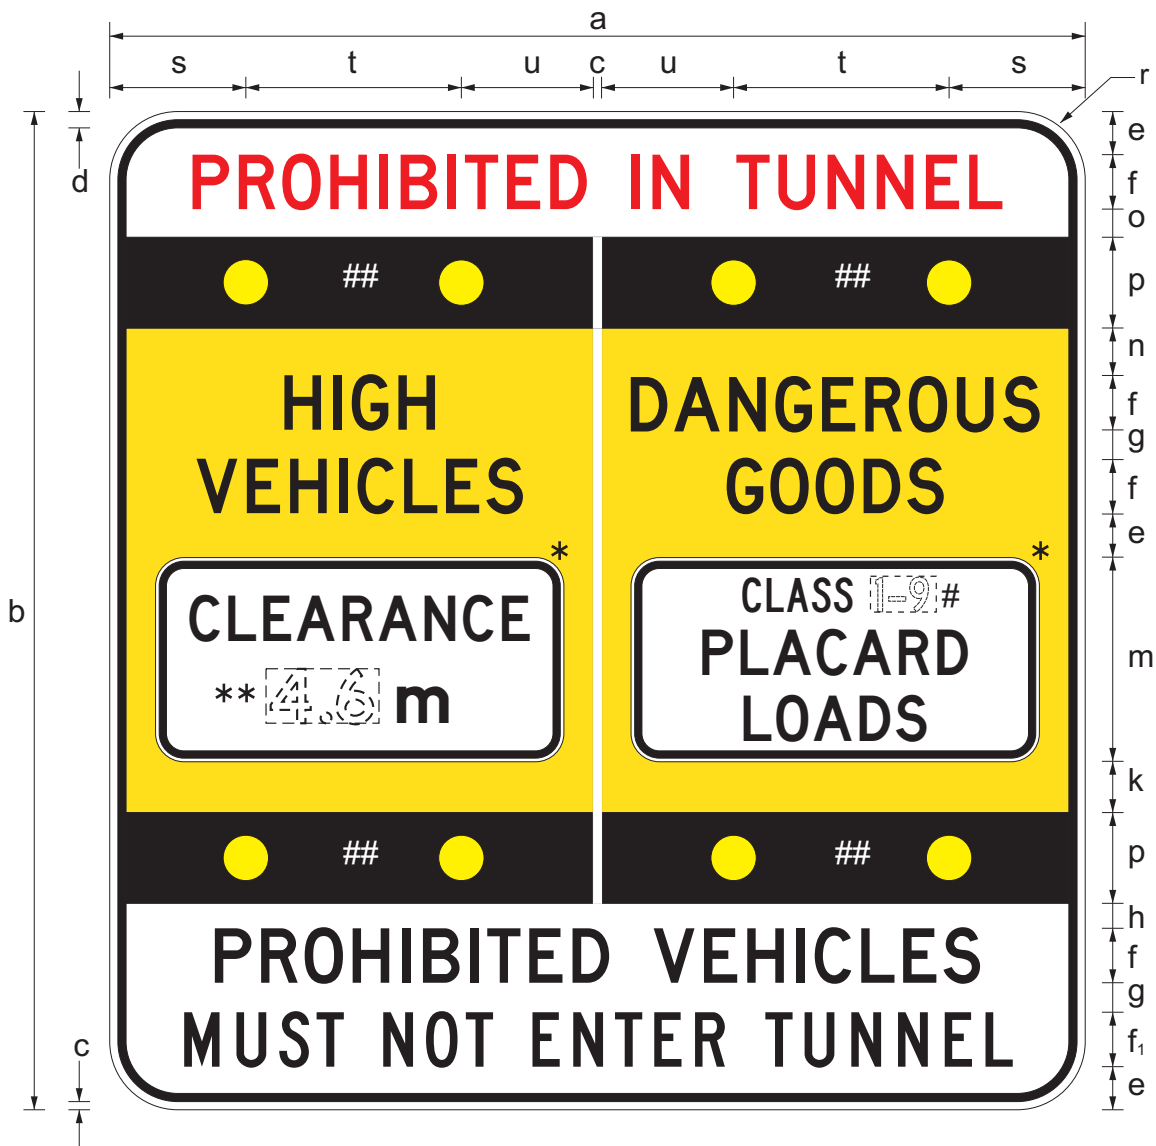

	a	b	c	d	e	f	f ₁	g	h	k	m	n	o	p	s	t	u	r
A	2150	2600	18	36	95	120DN	120CM	65	55	113	450	105	62	400	300	475	291	150
B	3225	3500	25	50	140	180DN	180CM	100	80	170	675	160	95	400	450	715	435	200
C	4300	4400	36	72	190	240DN	240CM	130	110	225	900	210	125	400	600	950	582	300

Colour Legend

- Black
- Retroreflective white
- Retroreflective yellow
- Retroreflective red

Notes:

1. May be used in advance of a tunnel where an alternate route is available.
2. * See Page 6 for patch details.
3. ** Insert clearance height.
4. # Insert dangerous goods classes as required.
5. ## When high or dangerous goods vehicles are detected, the relevant group of 4 x 200 mm diameter flashing lanterns are to operate in accordance with ITS guidelines.



**Queensland
Government**

WARNING SIGN

“PROHIBITED IN TUNNEL - MUST NOT ENTER TUNNEL”

Road Safety and Systems Management Division
Road Safety Unit

ORIGINAL APPROVED AS OFFICIAL TRAFFIC SIGN

Designed
TV 2/10

Checked
DJ 02/10

Scale
Not to Scale


[Signature]
PRINCIPAL ENGINEER
(Traffic Engineering)

09/02/10
Date

TC1812_4

Page 4 of 6

A

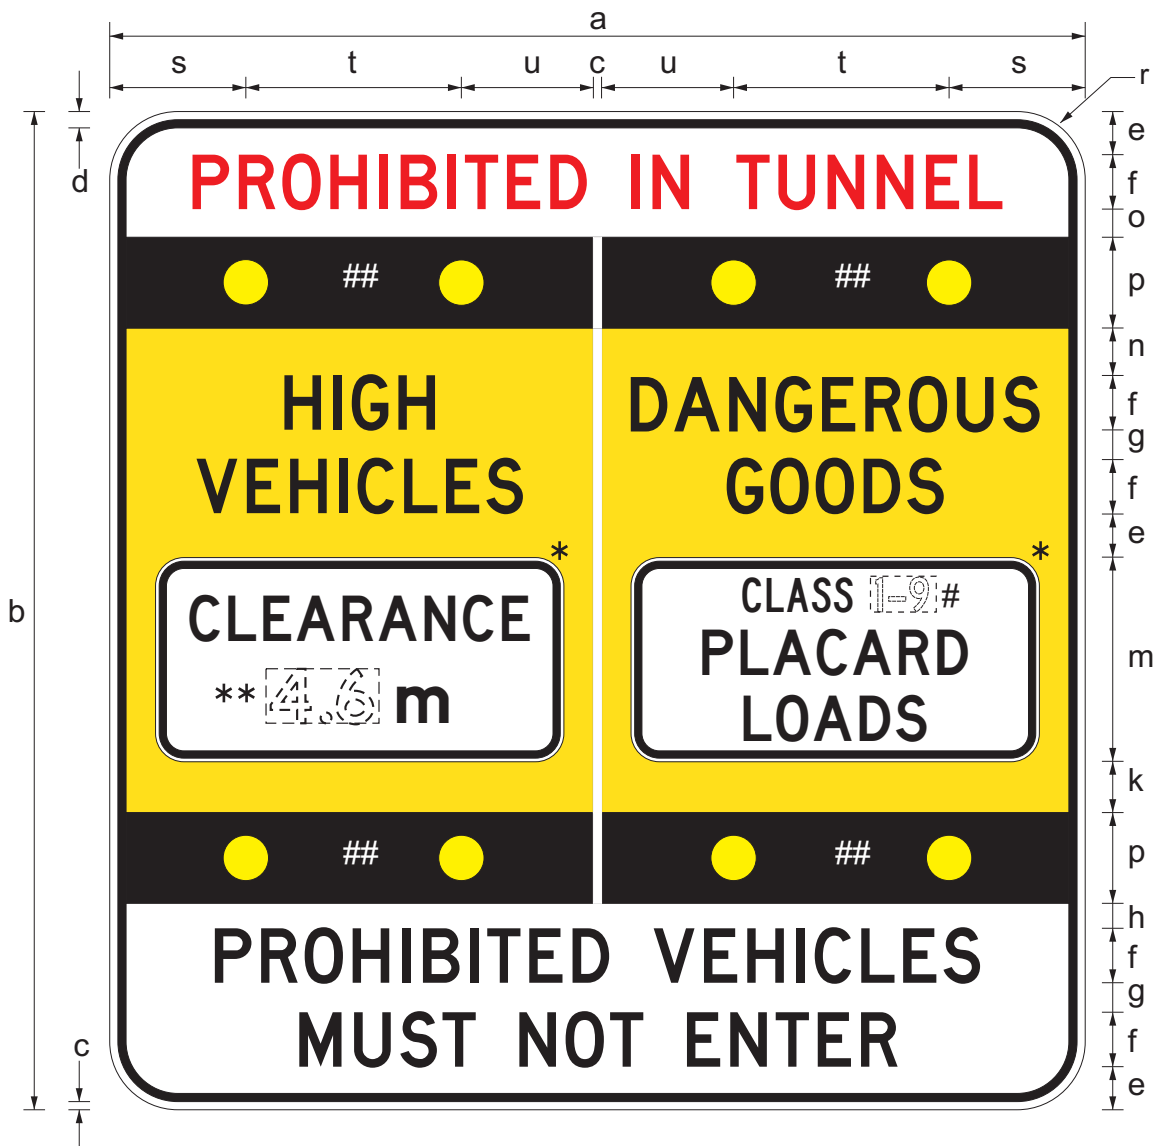

	a	b	c	d	e	f	g	h	k	m	n	o	p	s	t	u	r
A	2150	2600	18	36	95	120DN	65	55	113	450	105	62	400	300	475	291	150
B	3225	3500	25	50	140	180DN	100	80	170	675	160	95	400	450	715	435	200
C	4300	4400	36	72	190	240DN	130	110	225	900	210	125	400	600	950	582	300

Colour Legend

- Black
- Retroreflective white
- Retroreflective yellow
- Retroreflective red

Notes:

1. May be used in advance of a tunnel where an alternate route is available.
2. * See Page 6 for patch details.
3. ** Insert clearance height.
4. # Insert dangerous goods classes as required.
5. ## When high or dangerous goods vehicles are detected, the relevant group of 4 x 200 mm diameter flashing lanterns are to operate in accordance with ITS guidelines.



**Queensland
Government**

WARNING SIGN "PROHIBITED IN TUNNEL - MUST NOT ENTER"

Road Safety and Systems Management Division
Road Safety Unit

ORIGINAL APPROVED AS OFFICIAL TRAFFIC SIGN

[Signature]
PRINCIPAL ENGINEER
(Traffic Engineering)

09/02/10
Date

TC1812_5


Page 5 of 6

Designed
TV 2/10


Checked
DJ 02/10

Scale
Not to Scale

A ☐ ☐ ☐ ☐ ☐

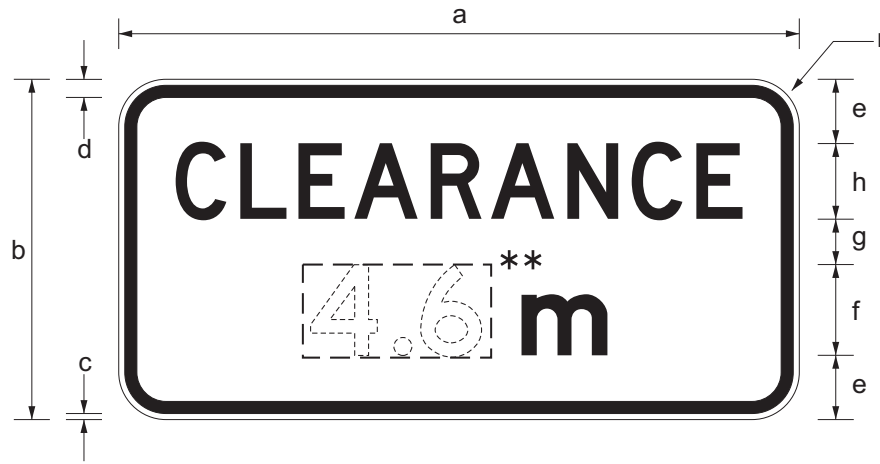

	a	b	c	d	e	f	g	h	r
A	450	900	8	24	85	120DN/90LC	60	100DN	50
B	675	1350	12	36	128	180DN/135LC	89	150DN	75
C	900	1800	16	48	170	240DN/160LC	120	200DN	100

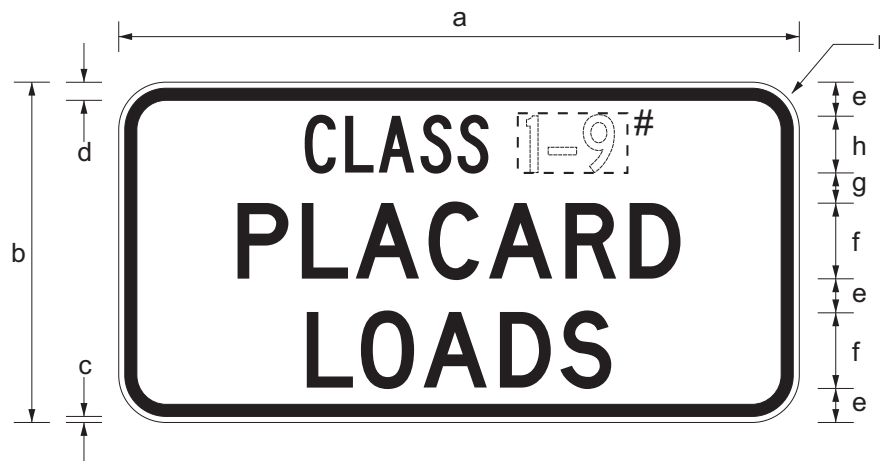

	a	b	c	d	e	f	g	h	r
A	450	900	8	24	45	100DN	40	75CN	50
B	675	1350	12	36	68	150DN	61	110CN	75
C	900	1800	16	48	90	200DN	80	150CN	100

Colour Legend

- ☒ Black
- ☐ Retroreflective white

Notes:

1. These plates to be utilised with TC1812_1 -TC1812_5.
1. ** Insert clearance height.
2. # Insert dangerous goods classes as required.



**Queensland
Government**

WARNING SIGN PLATES

"CLEARANCE / PLACARD LOADS"

Road Safety and Systems Management Division
Road Safety Unit

ORIGINAL APPROVED AS OFFICIAL TRAFFIC SIGN

[Signature]
PRINCIPAL ENGINEER
(Traffic Engineering)

09/02/10
Date

TC1812_6

Page 6 of 6

Designed
TV 2/10

Checked
DJ 02/10

Scale
Not to Scale

A ☐ ☐ ☐ ☐ ☐